

Access Panels Alu with fixed hinges

Aluminium frame, with or without plasterboard inlay, for ceilings and drywall partitions - System F1





Description

The access panel consists of aluminium profiles, with or without plasterboard inlay GKBI 12.5 mm, 15 mm or 25 mm and two latches.

Both, an outer and an inner frame of the access panel consist of four single frames, which are firmly connected due to a special welding process. For sizes from 300 x 300 mm, the access panel is equipped with a safety-system against accidental opening. In order to avoid accidents, this safety-system has to be secured after each opening. The access panel is easily installed in walls and inaccessible floor zones.

A joint gap of 1.5 mm is visible between outer frame and door leaf. The concealed snap locks open the access panel when pressure is applied to the flap on the spring loaded latch side.

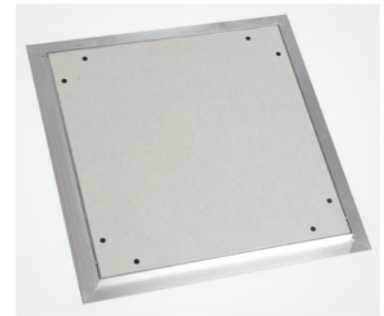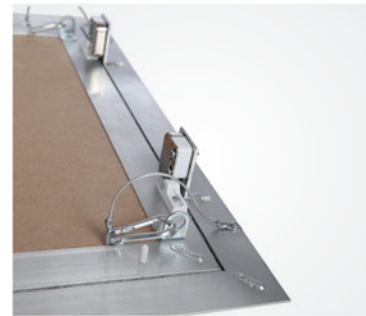

Standard sizes for cladding of 12.5 mm

System F1	Dimensions in mm				
	A	B	C	D	E
200200G125	200	200	13	28	40
300300G125	300	300	13	28	40
400400G125	400	400	13	28	40
500500G125	500	500	13	28	40
600600G125	600	600	13	28	40

All standard sizes are available for cladding thicknesses of 12.5 mm, 15 mm or 25 mm.

For further cladding thickness information, please do not hesitate to call us.

Customized solutions

Customized sizes can be produced in every dimension upon enquiry.

Locks

The access panel can be equipped with the following types of bolts:

- Four-square bolt
- Round-cylinder lock
- Profile cylinder

Particular advantages of our system

- Economical solution
- Delivery at short notice on request
- Easy and quick assembly
- Solid aluminium frame
- Sophisticated solution
- Flush installation in ceilings and drywall partitions
- Also applicable to perforated gypsum board
- Superior protection from damage or loss, as the hatch is firmly connected to the outer frame
- Lateral opening is possible in the wall area